



Pass-Through dishwashers Easy Line




GE-H500



500x500



Lower washing and rinsing arms +
stainless steel filters

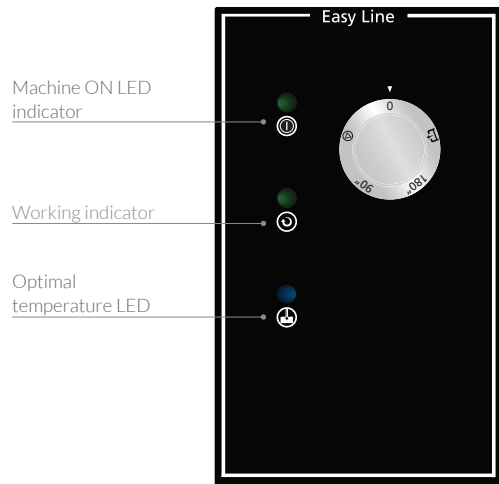

Control Panel

GE-H500

- Electromechanical control panel.
- 2 washing cycle of 90" / 180".
- Continuous cycle up to the manual stop.
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Boiler capacity: 7 l. / Heating power: 6.0 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 3.0 l./rinse.
- Upper and lower washing and rinsing arms.
- Stainless steel washing arms.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Stainless steel filtering system.
- Safety thermostat in washing tank and boiler.
- Temperature adjustment: wash 60 °C and rinse 85 °C.
- Multi-Voltage: 400V/3N, 230V/3, 230V/1N.
- Adjustable boiler heating power (Multi-Power) in 230V / 1N: 2.0 kW / 3.0 kW / 4.0 kW / 6.0 kW.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

OPTIONAL MODELS WITH

- Built-in detergent aid dispenser.
- Built-in draining pump.
- Stainless steel rinsing arms.
- 60 Hz version.

Model	Reference	Baskets / hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Power (kW)	Voltage (V)
GE-H500	19053415	40	420	675 x 675 x 1420	No	No	11,1	400V-3N-50Hz
GE-H500 DD	19052927	40	420	675 x 675 x 1420	Yes	No	11,1	400V-3N-50Hz
GE-H500 B	19059587	40	420	675 x 675 x 1420	No	Yes	11,1	400V-3N-50Hz
GE-H500 B DD	19056118	40	420	675 x 675 x 1420	Yes	Yes	11,1	400V-3N-50Hz